

FERRI®

SIMPLY. THE MOWER

T350S




Hydraulic reach mower with hedges cutterbar

- Ideal for working in confined spaces and for the horizontal and vertical cutting of hedges.
- Extremely versatile, it can work both on the right and on the left hand side of the tractor.
- Designed for compact tractors.



T350S DIMENSIONS

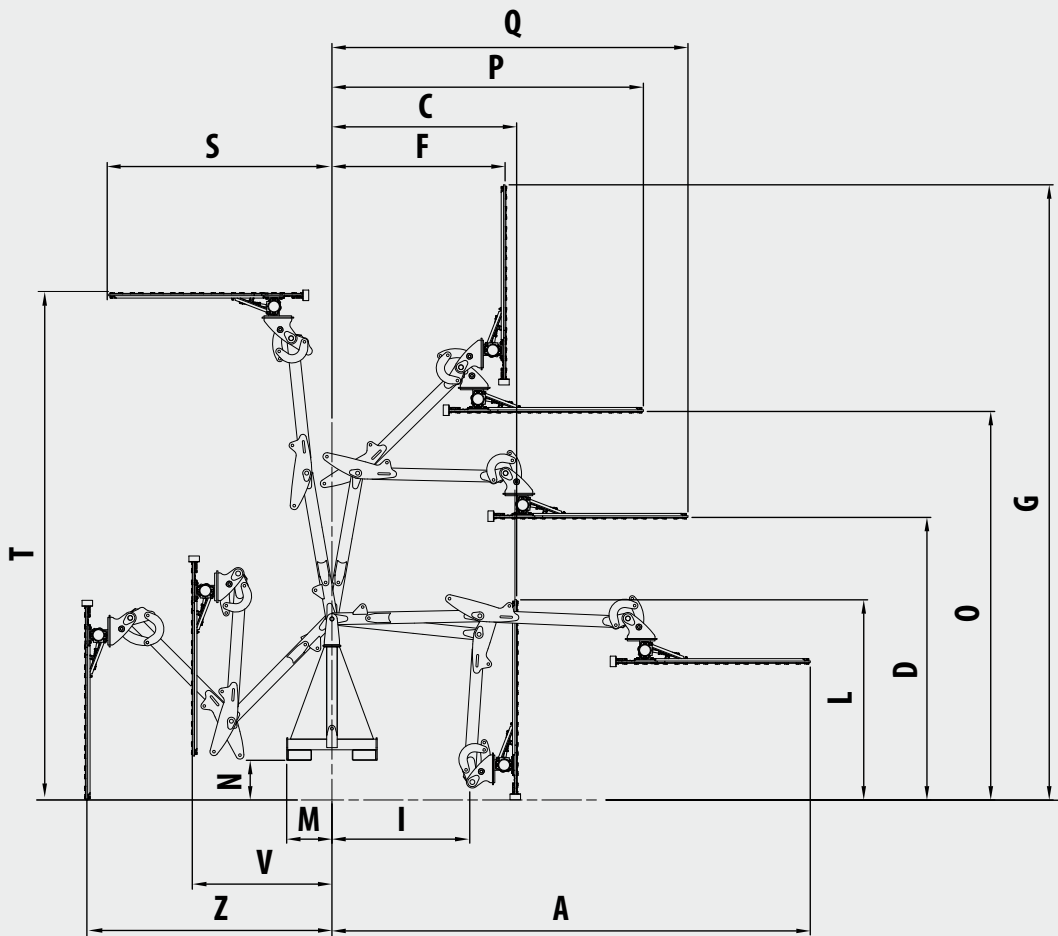

T350S		
A	m (ft)	3,62 (11.10)
C	m (ft)	1,40 (4.7)
D	m (ft)	2,14 (7.0)
F	m (ft)	1,31 (4.3)
G	m (ft)	4,66 (15.3)
I	m (ft)	1,10 (3.70)
L	m (ft)	1,52 (4.11)
M	m (ft)	0,35 (1.1)
N	m (ft)	0,30 (0.11)
O	m (ft)	2,94 (9.7)
P	m (ft)	2,36 (7.8)
Q	m (ft)	2,70 (8.1)
S	m (ft)	1,72 (5.7)
T	m (ft)	3,92 (12.1)
V	m (ft)	1,26 (4.1)
Z	m (ft)	2,02 (6.7)

TECHNICAL DATA

Tractor		T350S
Min Tractor power	HP (KW)	15 (11)
Max Tractor power	HP (KW)	50 (50)
Min. Tractor weight	Kg (lbs)	700 (1543)
Min. Tractor width	m (ft)	1,00 (3.28)
T350S		T350S
Required oil flow	l/min. (gal/min)	19/22 (5.02/5.94)
Oil recommended load	l/min. (gal/min)	22 (5.90)
Power	HP (KW)	6,40 (4.77)
Pressure	bar (Psi)	140 (2030)
Weight	kg (lb)	230 (507)
Rod length	m (ft)	1,5 (4.92)
Tractor linkage	Cat	I ^a

T350 - GB - 0117



SIMPLY. THE MOWER



The technical data and the models described are not binding. For purposes of improvements the manufacturer reserves the right to any alternation, without notice. Drawings and photographs may refer to optional or particular equipment for other countries. For further information, please contact our sales network.

